



Features & Benefits

I/O Connectivity



Ultra-thin, extremely compact design
 ■ 2.4" Mounting Depth

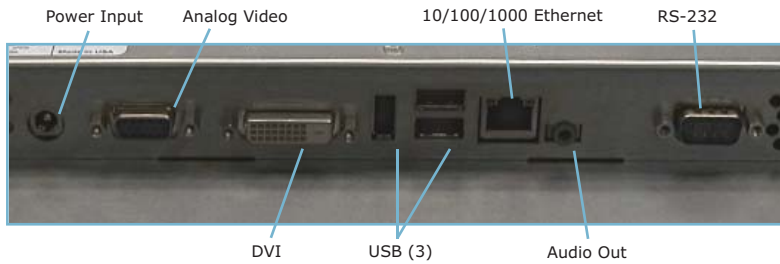

5-wire Analog Resistive Touchscreen

Made with Pride in the USA

UL 508, cUL, CE, & RoHS Approvals

Intel Inside
 ■ CPU board & processor
 ■ Solid state drive

Power Input
 ■ 12 VDC input supplied by Listed ITE power supply or Class 2 source



Powder Coated Aluminum Front Panel
 ■ No logo front panel option



VESA Mounting
 ■ 75mm



NEMA Panel Mounting via Clips



Optional NEMA 1 Powder Coated Rear Enclosure
 ■ Vented, Not Water or Dust Proof
 ■ Shown with optional mounting arm (sold separately)



High Performance/ Very Low Power Fanless Processor
 - Intel® ATOM N270
 (1.6 GHz, 512 K Cache, 533 MHz bus)



External 100-240 VAC Power Supply
 ■ Regulated 12 VDC, 3.75 A Max output (ships with ePC15T)



Standard 2-year warranty
 ■ Covers parts and service



Meet all RoHS Hazardous Safety Standards.

